

Libra 3405UC / 3412UC

The Libra 3405UC / 3412UC feature global shutter color CMOS sensors, delivering high-speed, high-resolution imaging. Covering a wide spectral range of 350 nm–1100 nm, they provide excellent performance for multi-channel fluorescence applications. Equipped with a USB 3.0 interface, they offer plug-and-play operation and direct connection to standard microscopes and computers for efficient workflows.



Key Features


	Benefits
Global Shutter	High-speed, artifact-free imaging, ideal for high-throughput slide scanning.
350 nm–1100 nm Wide Spectrum	Suitable for multi-channel fluorescence and near-infrared detection.
3.4 μ m Pixel Size	Optimized for < 40X optical systems, enables higher resolution for cellular and tissue imaging.
AI Color Correction	Provides accurate and true-to-life color reproduction for pathology applications. ^[1]
USB 3.0 Interface	Plug-and-play, enabling highly efficient microscopy workflows.
Mosaic 3.1 Software	Provides advanced image processing and real-time quantitative analysis to boost efficiency.

Typical Applications

- Fluorescence Scanning
- Pathology Scanning
- Bright Field Image
- Industrial Inspection


Noted Examples

[1] The AI color correction is trained for bright-field microscopy, eliminating manual white balance and accurately reproducing true-to-eye colors.

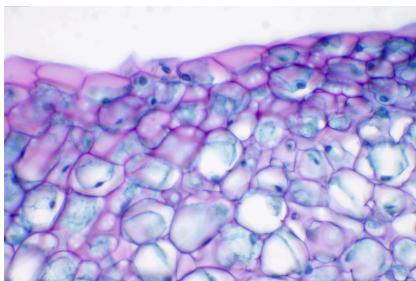


A 40x pathological photo taken by the AI Color Correction function, showing clear cellular details and distinct color gradations.

Quantum Efficiency

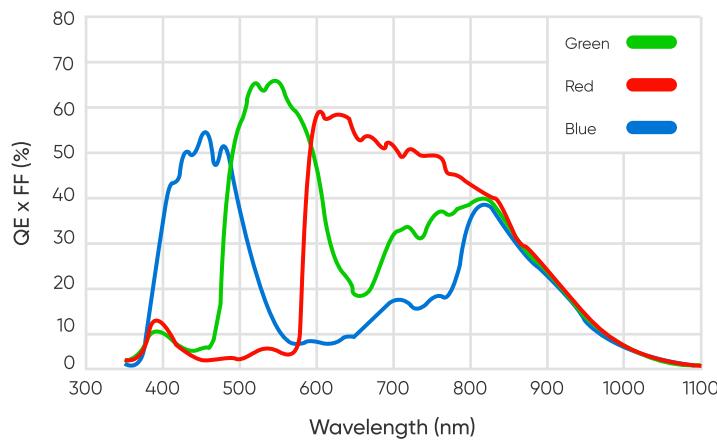

Dimensions (Unit: mm)

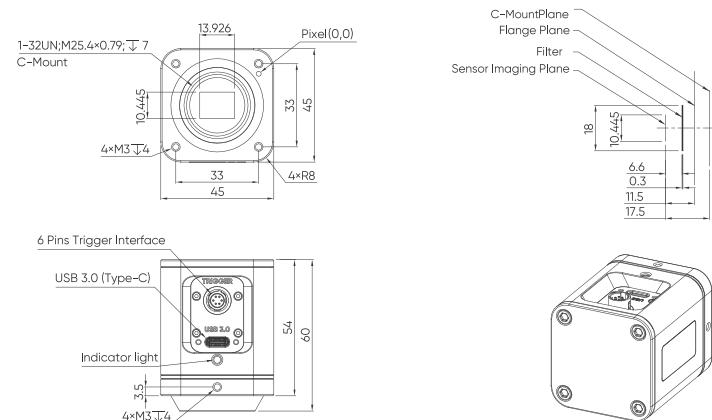

Specifications

Model	Libra 3405UC	Libra 3412UC		
Sensor Type	CMOS			
Sensor Model	Gpixel GMAX 3405	Gpixel GMAX 3412		
Chrome	Color			
Array Diagonal	10.9 mm (2/3")	17.4 mm (1.1")		
Effective Area	8.3 mm x 7.0 mm	14.0mm x 10.5mm		
Pixel Size	3.4 μ m x 3.4 μ m			
Resolution	2448 (H) x 2048 (V)	4096 (H) x 3072 (V)		
Peak QE	Please refer to the quantum efficiency curve for details			
Gain Mode	High Capacity, Balanced, Sensitive			
Full Well Capacity	12bit: High Capacity 8.7 Ke-, Balanced 4.5 Ke-, Sensitive 0.5 Ke-	12bit: High Capacity 9 Ke-, Balanced 4.4 Ke-, Sensitive 0.7 Ke-		
Frame Rate	12 bit 45 fps	8 bit 65 fps	12 bit 18 fps	8 bit 28 fps
Readout Noise 12 bit (Median)	3.6 e-@High Capacity, 2.3 e-@Balanced, 1.6 e-@Sensitive		3.9 e-@High Capacity, 2.6 e-@Balanced, 1.8 e-@Sensitive	
Shutter Mode	Global			
Exposure Time	1 μ s~10 s			
AI White Blance	Support			
Image Correction	DPC			
ROI	Support			
Binning (FPGA)	1x1 , 2x2 , 4x4			
Cooling Method	Passive Cooling			
Trigger Mode	Hardware, Software			
Trigger Output	Exposure, Readout, Trigger Ready			
Trigger Interface	Hirose-6-Pin			
Data Interface	USB 3.0			
Bit Depth	12bit, 8bit			
Optical Interface	C-Mount / Customization			
Power Supply	USB			
Power Cons.	< 4 W			
Dimensions	45 mm (H) x 45 mm (W) x 60 mm (L)			
Weight	~162.5 g			
Software	Sample Pro, Mosaic 3.1, LabVIEW, MATLAB			
SDK	C / C++ / C# / Python			
Operating System	Windows, Linux			
Environment	Working: Temp. 0°C~40°C, HUM 10%~85%, Storage: Temp. -10°C~60°C, HUM 0%~90%			



*Specifications in this manuat are subject to changes without prior notice.

Follow us

+86 (591) 2805 5076 ext.818

www.tucsen.com

support@tucsen.com